USPEH FILTER

PREFILTERS – PANEL

PROPERTIES

Class (CEN EN 779)	G3	G4
EUROVENT class	EU3	EU4
Average Arrestance Am [%]	80<Am<90	Am>90
Initial Presure Drop	40 Pa	
Final Pressure Drop	250 Pa	
Max. Operating Temperature	80°C	

Frame	Galvanized Sheet
Media	Polyester Synthetic
Market	HVAC, Food, Beverage, Industrial

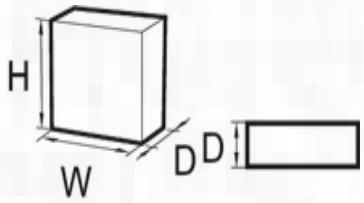

H - height , W - length, D - thickness

TECHNICAL DETAILS

Class	Dimensions WxHxD [mm]	Air Flow [m³/h]	Weight [kg]	Dust holding capacity [g]
G3	287x592x20	900	0,60	80
	400x400x20	950	0,65	85
	400x500x20	1100	0,80	95
	400x600x20	1300	0,85	120
	500x500x20	1300	0,85	120
	500x600x20	1600	0,95	150
	592x592x20	1800	1,10	170
G4	287x592x20	950	0,60	100
	400x400x20	900	0,65	85
	400x500x20	1100	0,80	120
	400x600x20	1300	0,85	140
	500x500x20	1300	0,85	140
	500x600x20	1600	0,95	180
	592x592x20	1800	1,10	200

Bulgaria, 1360, Sofia, boul. Europa 138, tel: +35929268844, +35929268833, fax: +35929268898, web: uspehfilter.com, e-mail: info@uspehfilter.com